



DETAIL AT CURB & GUTTER

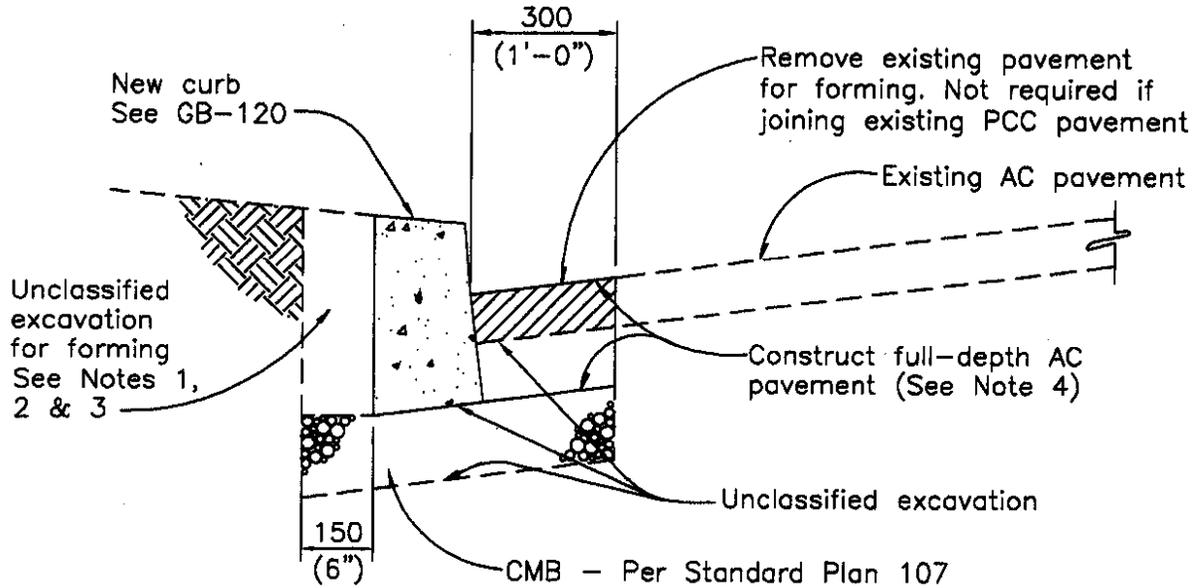

DETAIL AT CURB

All dimensions are millimeters, except as noted.

REVISIONS		CITY OF LONG BEACH, CALIFORNIA DEPARTMENT OF PUBLIC WORKS	STANDARD PLAN NO.
NO.	DATE		METRIC
1	11/28/01	CURB & GUTTER, CURB AND SIDEWALK OR DRIVEWAY REPLACEMENT OR CONSTRUCTION	116
2	12/23/02		
3			
4		APPROVED BY: <i>[Signature]</i> CITY ENGINEER R.E. No. 40599	DATE: 4/6/03 EX. DATE 03/31/07
			SHEET 1 OF 2

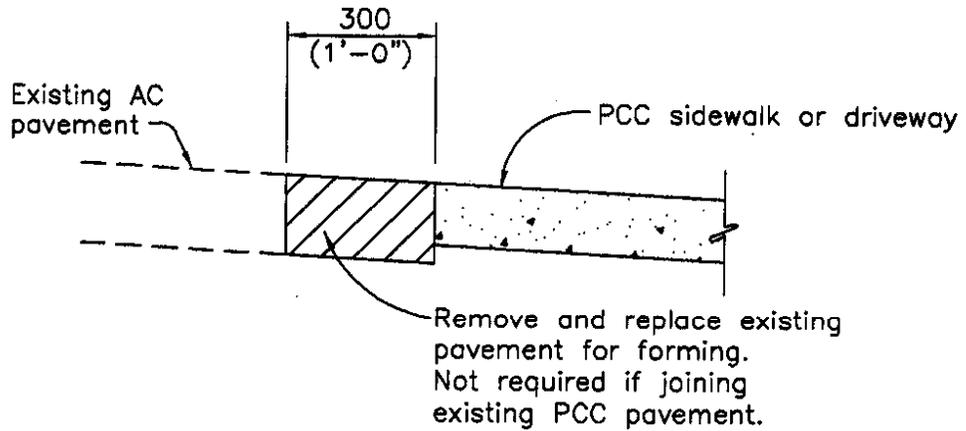

DETAIL AT SIDEWALK OR DRIVEWAY

NOTES:

1. Protect existing sprinkler systems, electrical conduit, water meters, service laterals, and all other underground utilities adjacent to curb and gutter replacement.
2. Backfill excavated area with clean earth from excavation.
3. Reseed to match existing lawns in excavated areas.
4. 50 mm (2") asphalt concrete pavement on Class 60-E-1 (200-E-200) slurry may be used in lieu of full-depth asphalt concrete pavement restoration.

All dimensions are millimeters, except as noted.

REVISIONS		CITY OF LONG BEACH, CALIFORNIA DEPARTMENT OF PUBLIC WORKS	STANDARD PLAN NO.
NO.	DATE		
1	06/15/98	CURB & GUTTER, CURB AND SIDEWALK OR DRIVEWAY REPLACEMENT OR CONSTRUCTION	METRIC
2	12/23/02		116
3			SHEET
4			2 OF 2
APPROVED BY: <i>[Signature]</i>		CITY ENGINEER R/L No. 40599	DATE: 4/4/03 EX. DATE 03/31/07